

Reolink Duo Floodlight PoE

4K PoE Floodlight Camera with Dual Lens, 180° Seamless Panorama

- Dual Lens
- 4K 180° Panorama
- Powerful Floodlights
- Power-over-Ethernet

Specifications

Video & Audio	
Image Sensor	1/2.7" CMOS Sensors
Video Resolution	Default: 4608×1728 (8.0 megapixels) at 20 frames/sec
Lens	f = 3.2 mm fixed, F = 2.0
Video Compression	H.265/H.264
Field of View	Horizontal: 180°; Vertical: 60°
Day & Night	Auto-switching with IR cut filter
Infrared Night Vision	30 meters (LED: 14pcs/20mil/850nm)
Color Night Vision	Floodlight: 40pcs/15W/4200K/1800 Lumens
Audio	Two-way audio
Power	
PoE	IEEE 802.3at, 48V Active
DC Power	DC 12V 2A, <24W
Interface	


Power	DC power port
System	Reset button
Ethernet	One 10M/100Mbps; RJ45
Storage	microSD card slot (Max. 512GB)
Audio	Built-in microphone and speaker
Software Features	
Frame Rate	Main stream: 4fps - 20fps (default: 20fps); Sub stream: 4fps - 20fps (default: 10fps)
Code Rate	Main stream: 3072-10240Kbps (default: 8192kbps); Sub stream: 256-2048Kbps (default: 1024kbps)
Browser Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarm	Motion detection; person detection; vehicle detection; animal detection
Record Mode	Motion-triggered recording (default); scheduled recording
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Maximal User Access	20 Users (1 admin account & 19 user accounts); 12 simultaneous video streams (10 substreams & 2 mainstreams)
Works with	Google Assistant
Working Environment	
Temperature	-10°C to +55°C (14°F to 131°F)
Humidity	10% to 90%
Weatherproof	IP66
Size & Weight	
Dimensions	195×103×56 mm
Weight	1.25kg
Warranty	
Limited Warranty	

2-year limited warranty. For support, visit
<https://support.reolink.com/hc/en-us/>

Gallery & Specs



- 1. Lens
- 2. IR LED
- 3. Floodlight
- 4. Daylight Sensor
- 5. Mic

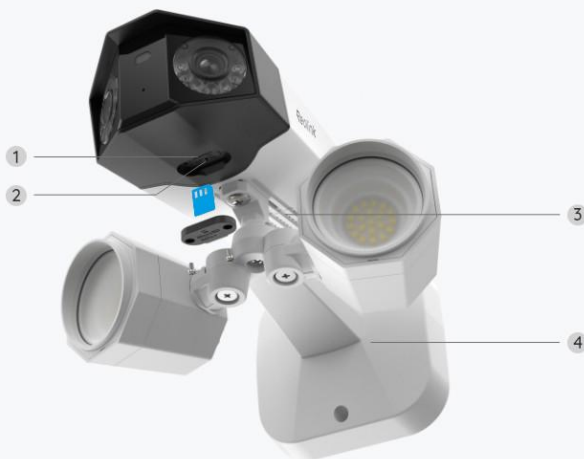

- 1. microSD Card Slot
- 2. Reset Button
- 3. Speaker
- 4. Mounting Bracket





You can adjust the floodlights in any direction, even after fixing the camera.



1. DC Power Port
2. LAN Port
3. Charging Port for the Floodlight

www.reolink.com