

FE-P

6MP PoE 360° Panoramic Indoor Fisheye Camera with Smart Detection, Night Vision & Two-Way Audio

- 6MP Super HD
- 360° Panoramic View
- Power over Ethernet




Specifications

Video & Audio	
Image Sensor	1/2.5" CMOS sensor
Video Resolution	2560X2560 (6.5Megapixels) @25FPS
Lens	f=1.98mm F=2.0 IR CUT
Video Compression	H.265/H.264
Field of View	180°(H), 180°(V), 180°(D)
Day & Night	IR-cut filter & auto-switching
Infrared Night Vision	8 Meters (3pcs/850nm)
Audio	Two-Way Audio
Power	
PoE	IEEE 802.3af, 48V Active
DC Power	DC 12.0V 1A, <12W
Interface	
Power	DC 12V/1A & PoE (IEEE 802.3af)
System	Reset button

Ethernet	One 10M/100Mbps RJ45
Storage	microSD card slot (Max. 256GB); Reolink NVR
Audio	Built-in Microphone and Speaker
Software Features	
Frame Rate	2-25FPS
Code Rate	Main stream: 4096-8192Kbps, default: 6144kbps; Sub stream: 64-512Kbps, default: 256kbps
Browser Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarm	Motion detection, AI detection
Record Mode	Motion recording (default); schedule recording; 24/7 recording
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPV4,UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Maximal User Access	20 Users (1 admin account & 19 user accounts); Up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
Work with	Google assistant
Working Environment	
Temperature	-10°C to +55°C (14°F to 131°F)
Humidity	10% – 90%
Size & Weight	
Dimensions	Φ126×49.2mm
Weight	293g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/

Gallery & Specs

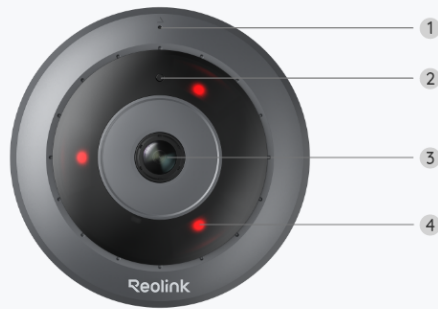

- 1. Microphone
- 2. Daylight Sensor
- 3. Lens
- 4. IR LED



- 1. Reset Button
- 2. microSD Card Slot
- 3. Mount Base



- 1. Power
- 2. Network
- 3. Waterproof Lid