



Home Hub Pro with TrackMix WiFi

4K Wi-Fi 6 dual-lens wireless camera system with 2TB HDD, 16TB storage capacity, auto-zoom tracking, spotlight color night vision, dual-band Wi-Fi, weekly insights, etc. Expandable up to 24 Reolink cameras.

- Wide-Angle & Telephoto Lenses
- Auto-Zoom Tracking
- Local Storage with 2TB HDD
- No Monthly Fees



Specifications

Reolink TrackMix WiFi	
Video & Audio	
Image Sensor	1/3"+1/2.8" CMOS Sensors
Video Resolution	3840 x 2160 (8 Megapixels) @20fps
Lens	f=2.8mm@F=1.6, f=8mm@F=1.6
Video Compression	H.264, H.265
Field of View	Horizontal: 104°-38° Vertical: 60°-21°
Zoom	6× Hybrid Zoom
Infrared Night Vision	Up to 30 Meters (100ft); LED: 2pcs/850nm (Auto-switching with IR-cut filter)
Color Night Vision	With Spotlights: 2pcs/4W/6500K

Frame Rate	Main Stream: 4fps - 20fps(default: 20fps) Sub Stream: 4fps - 20fps(default: 10fps)
Code Rate	Main Stream: 2048Kbps -5120Kbps Sub Stream: 128Kbps -1128Kbps
Audio	Two-way Audio
Power Requirements	
DC Power	DC 12.0V 2A
Interface	
Power	DC power port
Reset Button	YES
Ethernet Port	One 10M/100Mbps; RJ45
SD Card Slot	Supports Max. 512GB microSD Card
Audio In/Out	Built-in Microphone and Speaker
Pan & Tilt	
PT Angle(Max.)	Pan: 355°, Tilt: 90°
Pan Speed	90/8°-90°/s (Speed Adjustable)
Tilt Speed	60/8°-60°/s (Speed Adjustable)
Preset Points	Supports 1 Guard Point & up to 64 Patrol Points
Power-off Memory Function	YES
Auto Tracking	YES
Wi-Fi	
Wireless Standard	IEEE 802.11 ac/ax/a/b/g/n
Operating Frequency	2.4GHz/5GHz
Wireless Security	WPA/WPA2/WPA3
Software	
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android

Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
User Access	Max. 20 users (1 admin & 19 users); Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features	
Smart Alarm	Motion detection; Person Detection/Vehicle Detection/Animal Detection
Time Lapse	YES
Smart Home Compatibility	Google Assistant
Software Features	
Record Mode	Motion-triggered Recording (Default); Scheduled Recording; 24/7 Recording
Working Environment	
Operating Temperature	-10°C~+55°C (14°F~131°F)
Operating Humidity	10% ~ 90%
Weatherproof	YES
Mechanical	
Dimensions	228.2*147*129mm
Weight	1.21KG
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/
Reolink Home Hub Pro	
Device Management	
Camera	Up to 24 cameras
Device Compatibility	All Reolink battery Wi-Fi cameras, Plug-in Wi-Fi cameras, and PoE cameras (Battery cameras require a firmware upgrade)
Safety Protection	Account access and sharing options for individual devices are only available through Home Hub Pro

Input/Output	
HDMI	YES
USB	YES
Reset Button	YES
Power	DC 12V/2A
Speaker	Max.120dB
Ethernet	1 x RJ-45 10/100 Mbps self-adaptive (for WAN),1 x RJ-45, 10/100 Mbps self-adaptive (for IP cameras)
Storage	
SATA	YES (1 x 2TB HDD included)
microSD Card Slot	Up to 512GB*1
Storage Encryption	AES-128 encryption algorithm
Preview & Playback	
Live View	App, PC Client
Playback	Smart playback/event history
Wi-Fi	
Wireless Standard	IEEE 802.11 a/b/g/n/ac/ax
Operating Frequency	2.4/5 GHz
Wireless Security	WPA/WPA2/WPA3
Sub-1 GHz	
Operating Frequency	868/915MHz
System	
Network Protocols	TCP/IP, UDP, DHCP, P2P, UPNP, RTSP,RTMP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Max. User Access	11 users (1 admin account & 10 shared accounts)
Smart Home	Google Assistant
Working Environment	

Operating Temperature	-10°C~+45°C
Operating Humidity	10%~90%
Mechanical	
Dimensions	185*133*222mm
Weight	1096g
Warranty	
Limited Warranty	2-year limited warranty


Gallery & Specs




- 1. Infrared LED
- 2. Lens
- 3. Mic
- 4. Daylight Sensor
- 5. Spotlight



- 1. microSD Card Slot
- 2. Reset Button

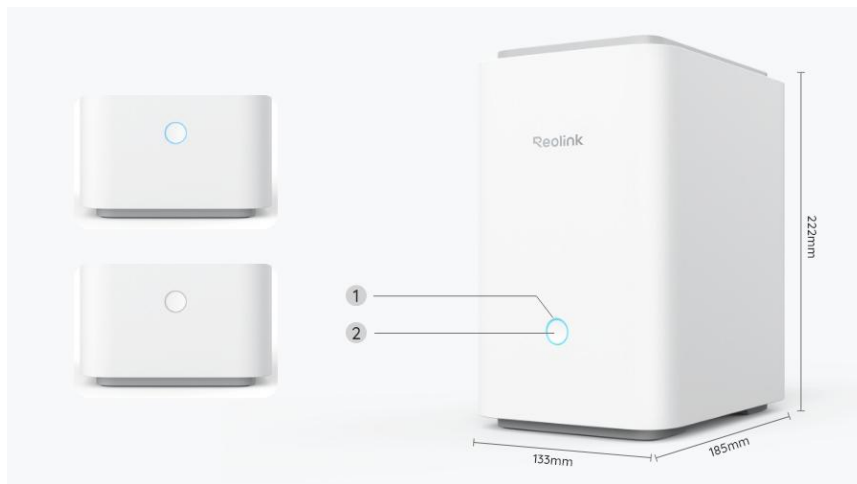

1. Indicator LED
2. Power Button

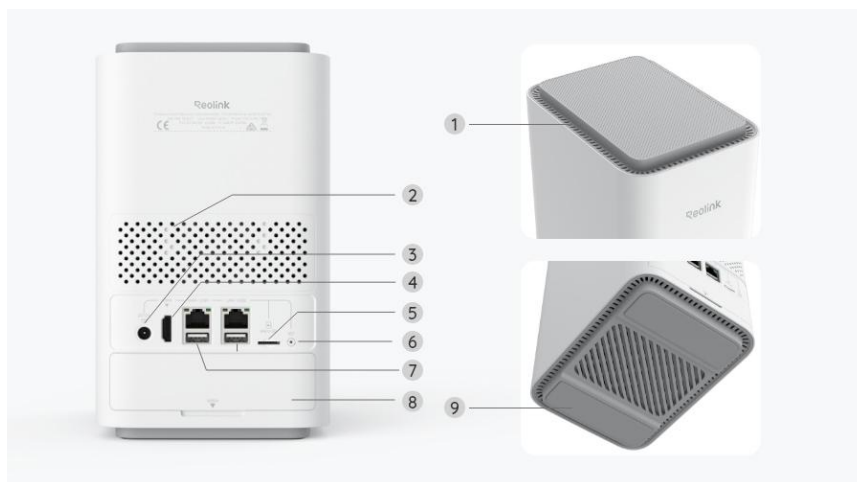

1. Ventilation Holes
2. Speaker
3. DC Input Port
4. HDMI Port
5. microSD Card Slot
6. Reset Button
7. USB Port
8. Hard Drive Bay
9. Silicone Pads

www.reolink.com