

Home Hub with Argus 4 Pro

4K Wi-Fi 6 centralized management system featuring dual-lens design, colorX night vision, smart detection, weekly insights, etc.

- 4K UHD 180° Blindspot-free View
- ColorX Night Vision
- Expandable Up to 8 Reolink Cams
- Local Storage, No Monthly Fees



Specifications

Reolink Argus 4 Pro	
Video & Audio	
Image Sensor	1/1.8" CMOS sensor
Resolution	5120x1440 (8 megapixels) @15fps
Lens	f=4mm, fixed
Video Compression	H.264/H.265
Field of View	Horizontal: 180° Vertical: 50°
Infrared Night Vision	NO
Color Night Vision	With spotlights: 3pcs/2W/6500K
Frame Rate	Main stream: 10fps - 15fps (default: 15fps) Sub stream: 10fps - 15fps (default: 15fps)
Code Rate	Main stream: 1024Kbps - 4096Kbps (default: 2048Kbps) Sub stream: 256Kbps - 1024Kbps (default: 512Kbps)

Audio	Two-way audio
Power	
Battery	5000mAh rechargeable battery (Battery life varies based on settings, usage & temperature.)
Solar	Reolink Solar Panel 2 (6W)
Bluetooth Standard	
Bluetooth Standard	Bluetooth V5.0
Interface	
Power Port	USB Type-C port
SD Card Slot	Supports Max. 128GB microSD card
Reset Button	YES
Audio In/Out	Built-in microphone and speaker
Wi-Fi	
Wireless Standard	IEEE 802.11 a/b/g/n/ac/ax
Operating Frequency	2.4/5 GHz
Wireless Security	WPA-PSK/WPA2-PSK
Software	
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Protocols & Standards	SSL, TCP/IP, UDP, UPNP, SMTP, NTP, P2P
User Access	Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features	
Smart Alarm	PIR detection; Motion detection; Person/vehicle/animal detection
PIR Detecting Distance	Adjustable, up to 10m (33ft)
PIR Detecting Angle	170° horizontal
Recording Modes	Event-triggered recording
Time Lapse	YES


Smart Home Compatibility	Google Assistant
Home Hub Compatibility	YES
Cloud Storage	Supports Reolink Cloud (available in selected countries)
Working Environment	
Operating Temperature	-10°C~55°C (14°F~131°F)
Operating Humidity	20% ~ 85%
Weatherproof	IP66
Mechanical	
Dimensions	128*87*80mm
Weight	400g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .
Reolink Home Hub	
Device Management	
Camera	Up to 8 Cameras
Device Compatibility	All Reolink Wi-Fi/PoE Cameras (Battery cameras require a firmware upgrade)
Safety Protection	Account access and sharing options for individual devices are only available through Home Hub
Input/Output	
HDMI	NO
USB	NO
Reset Button	YES
Power	DC 12V/1A
Speaker	√(MAX 115dB)
Ethernet	1*10M/100M bit RJ45 Port for WAN

Storage	
SATA	NO
microSD Card Slot	Up to 1TB*2
Backup Media	NO
Storage Encryption	AES-128 encryption algorithm
Preview & Playback	
Live View	APP, PC Client
Playback	Smart playback/event history
Wi-Fi	
Wireless Standard	IEEE 802.11 a/b/g/n/ac/ax (Wi-Fi 6)
Operating Frequency	2.4/5 GHz
Wireless Security	WPA/WPA2/WPA3
System	
Network Protocols	TCP/IP, UDP, DHCP, P2P, UPNP, RTSP,RTMP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Max. User Access	11 users (1 admin account & 10 shared accounts)
Smart Home	Google Assistant
Working Environment	
Operating Temperature	-10°C~+45°C
Operating Humidity	10%~90%
Mechanical	
Dimensions	95*95*161.8mm
Weight	441g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .

Gallery & Specs



1. Button
2. Indicator Light
3. Vent

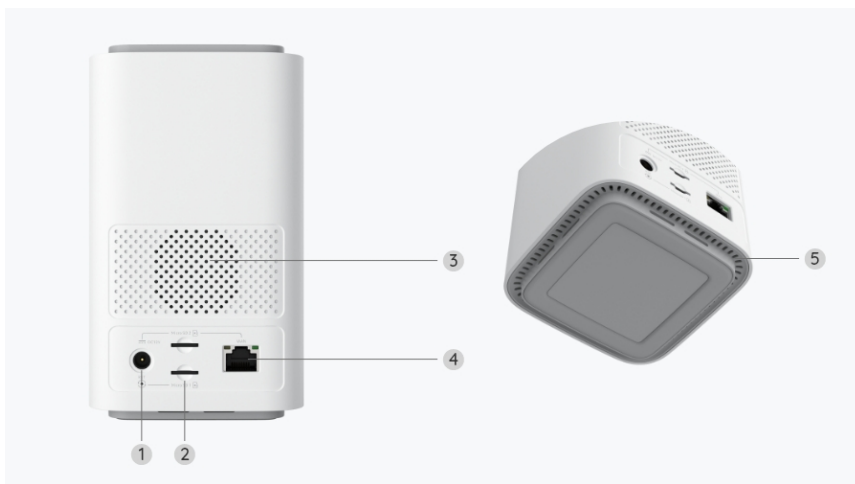

1. DC Input Port
2. microSD Card Slot
3. Speaker
4. LAN Port
5. Vent



1. F/1.0 - 4mm Lens
2. Spotlight
3. CDS
4. Spotlight
5. Microphone
6. PIR sensor



1. Loudspeakers
2. USB-C connection
3. Reset button
4. microSD slot



www.reolink.com