

RLN16-410

16-Channel PoE NVR, with 3TB/4TB HDD for 24/7 Reolink Cameras Reliable Video Recording

- 24-Channel PoE NVR
- Support up to 16MP
- Local & Remote Access



Specifications


Hardware	
Hardware	N6MB01
Video/Audio Input	
IP Video Input	Up to 24 IP cameras (max.16 wired cameras)
Audio Input	Cameras with built-in mic
Video/Audio Output	
Video Output	VGA, HDMI
Display Resolution	HDMI: 3840*2160, 1920*1080, 1280*1024, 1280*720, 1024*768 VGA: 1920*1080, 1280*1024, 1280*720, 1024*768
Audio Output	1-channel, RCA
Decoding	
Live View/Playback Resolution	7680×2160, 4608×1728, 4512×2512, 4096×3072, 3840×2160, 2560×2560, 2560×1920, 2560×1440, 2048×1536, 2304×1296, 1080p, 720p
Video Format	H.265, H.264
	Up to 4 channels

Synchronous Playback	
HDD	
SATA	2 x SATA interface
Capacity	Up to 16TB (max. 8TB capacity for each HDD)
External HDD	No
External Interface	
USB Interface	2 × USB 2.0
Network Interface	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface for LAN/WAN 16, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera
PoE	
Max. Power Per Port	25W
Supported Standard	IEEE 802.3 af/at
Network	
Network Protocol	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
Browser Supported	Firefox, Chrome, Edge, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Max. User Access	20 users (1 admin account & 19 user accounts); up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
General	
Power Supply	DC 48V~54V
Power Consumption	<10W (without HDD & PoE)
Working Environment	Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90%
Dimensions	330 × 45 × 285mm
Weight	2.4kg
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .

Gallery & Specs



- 1. USB Port
- 2. Power LED & HDD LED
- 3. Control Panel

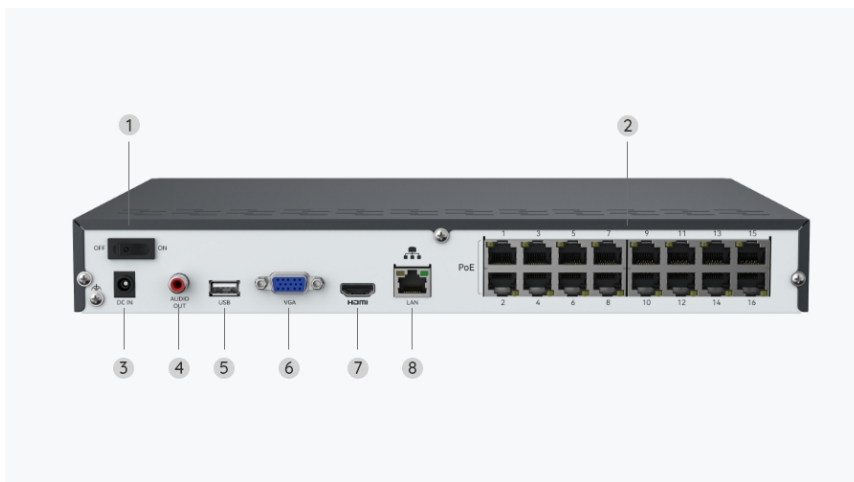

- 1. On/Off Switch
- 2. RJ45
- 3. Power Input
- 4. Audio Out
- 5. USB Port
- 6. VGA Port
- 7. HDMI Port
- 8. Network

www.reolink.com