

RLN8-410

8CH PoE NVR with 2TB HDD for 24/7 Continuous Video Recording with Reolink Cameras

- 12-Channel PoE NVR
- Support up to 16MP
- Local & Remote Access



Specifications




Hardware	
Hardware	N7MB01
Video/Audio Input	
IP Video Input	PoE IP Camera x 8
Audio Input	Cameras with built-in mic
Video/Audio Output	
Video Output	VGA, HDMI
Display Resolution	HDMI: 3840*2160, 1920*1080, 1280*1024, 1280*720, 1024*768 VGA: 1920*1080, 1280*1024, 1280*720, 1024*768
Audio Output	1-Channel, RCA
Decoding	
Live View/Playback Resolution	7680×2160, 4608×1728, 4512×2512, 4096×3072, 3840×2160, 2560×2560, 2560×1920, 2560×1440, 2048×1536, 2304×1296, 1080p, 720p
Video Format	H.264, H.265
	Up to 4 channels


Synchronous Playback	
HDD	
SATA	1 x SATA interface
Capacity	Up to 16TB (max. 8TB capacity for each HDD)
External HDD	1 eSATA Interface for HDD
External Interface	
USB Interface	2 x USB 2.0
Network Interface	• 1, RJ-45 10/100 Mbps self-adaptive Ethernet interface for LAN/WAN • 8, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera
PoE	
Max. Power Per Port	25W
Supported Standard	IEEE 802.3af/at
Network	
Network Protocols	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP, HTTPS, ONVIF
Browsers Supported	Edge, Firefox, Chrome, Safari
OS Supported	PC: Windows, Mac OS; smartphone: iOS, Android
Max. User Access	20 users (1 admin account & 19 user accounts); supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
General	
Power Supply	DC 48V~53V
Power Consumption	<10W (Without HDD&PoE)
Working Environment	Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90%
Dimensions	260 x 41 x 230mm
Weight	1.4kg
Warranty	

Limited Warranty

2-year limited warranty. For support, visit <https://support.reolink.com/hc/en-us/>.

Gallery & Specs

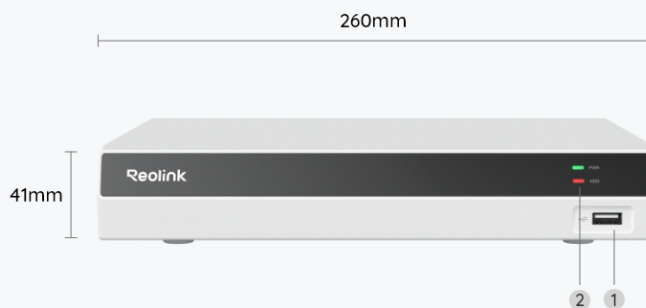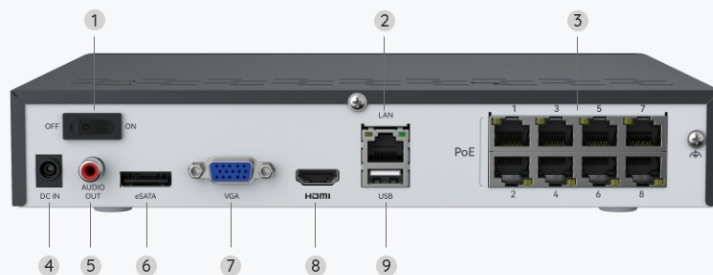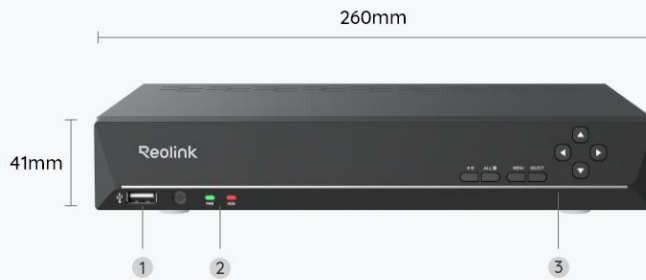

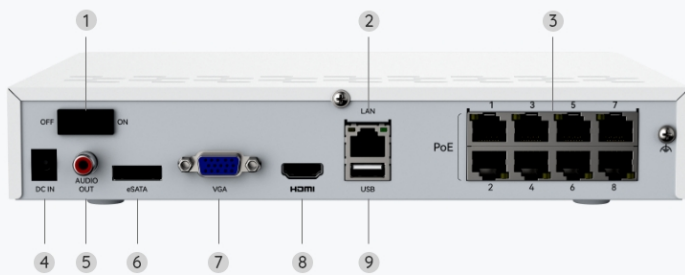

1. On/Off Switch
2. Network
3. RJ45
4. Power Input
5. Audio Out
6. eSATA
7. VGA Port
8. HDMI Port
9. USB Port

www.reolink.com