

Home Hub Pro with Lumus Pro

4K Wi-Fi 6 security system featuring 2TB HDD, 16TB storage capacity, spotlight color night vision, F1.6 lens aperture, weekly insights, etc. It supports up to 24 Reolink cameras.

- 4K 8MP UHD
- 2TB HDD Included
- Wi-Fi 6 Technology
- Expandable to 24 Reolink Cams
- AES-128 Encryption Protection



Specifications


Reolink Lumus Pro	
Video & Audio	
Image Sensor	1/2.7" CMOS Sensor
Resolution	3840x2160 (8 Megapixels) @15fps
Lens	f=2.8mm, F1.6 with IR Cut
Video Compression	H.265
Field of View	Horizontal: 106° Vertical: 56°
Infrared Night Vision	Up to 10 meters (33ft); LED: 6pcs/850nm (Auto-switching with IR-cut filter)
Frame Rate	2fps - 15fps (default: 15fps)
Code Rate	Main Stream: 2048Kbps -5120Kbps(default: 3072Kbps) Sub Stream: 64Kbps - 512Kbps (Default: 256Kbps)

Audio	Two-way Audio
DC Power	DC 5.0V 1A
Interface	
Power Port	DC Power Port
Reset Button	YES
SD Card Slot	Supports Max. 256GB microSD Card
Audio In/Out	Built-in Microphone and Speaker
Wi-Fi	
Wireless Standard	IEEE 802.11 ac/ax/a/b/g/n
Operating Frequency	2.4GHz/5GHz
Wireless Security	WPA/WPA2/WPA3
Bluetooth	
Frequency Band	2402MHz-2480MHz
Software	
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P, ONVIF
User Access	Max. 20 users (1 admin & 19 user); Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features	
Smart Alarm	Motion Detection; Person/Vehicle/Animal Detection
Recording Modes	Motion-triggered Recording (Default); Scheduled Recording, 24/7 Recording
Time Lapse	YES
Smart Home Compatibility	Google Assistant
Working Environment	
Operating Temperature	-10°C~+55°C (14°F~131°F)


Operating Humidity	20% ~ 85%
Weatherproof	IP65
Mechanical	
Dimensions	99×91×60mm
Weight	168g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/
Reolink Home Hub Pro	
Device Management	
Camera	Up to 24 cameras
Device Compatibility	All Reolink battery Wi-Fi cameras, Plug-in Wi-Fi cameras, and PoE cameras (Battery cameras require a firmware upgrade)
Safety Protection	Account access and sharing options for individual devices are only available through Home Hub Pro
Input/Output	
HDMI	YES
USB	YES
Reset Button	YES
Power	DC 12V/2A
Speaker	Max.120dB
Ethernet	1 x RJ-45 10/100 Mbps self-adaptive (for WAN), 1 x RJ-45, 10/100 Mbps self-adaptive (for IP cameras)
Storage	
SATA	YES (1 x 2TB HDD included)
microSD Card Slot	Up to 512GB*1
Storage Encryption	AES-128 encryption algorithm
Preview & Playback	
Live View	App, PC Client

Playback	Smart playback/event history
Wi-Fi	
Wireless Standard	IEEE 802.11 a/b/g/n/ac/ax
Operating Frequency	2.4/5 GHz
Wireless Security	WPA/WPA2/WPA3
Sub-1 GHz	
Operating Frequency	868/915MHz
System	
Network Protocols	TCP/IP, UDP, DHCP, P2P, UPNP, RTSP,RTMP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Max. User Access	11 users (1 admin account & 10 shared accounts)
Smart Home	Google Assistant
Working Environment	
Operating Temperature	-10°C~+45°C
Operating Humidity	10%~90%
Mechanical	
Dimensions	185*133*222mm
Weight	1096g
Warranty	
Limited Warranty	2-year limited warranty

Gallery & Specs

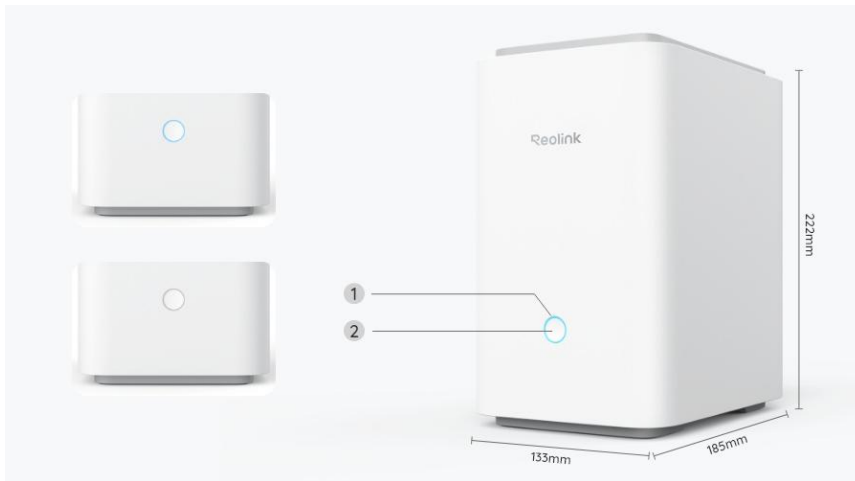

1. Indicator LED
2. Power Button

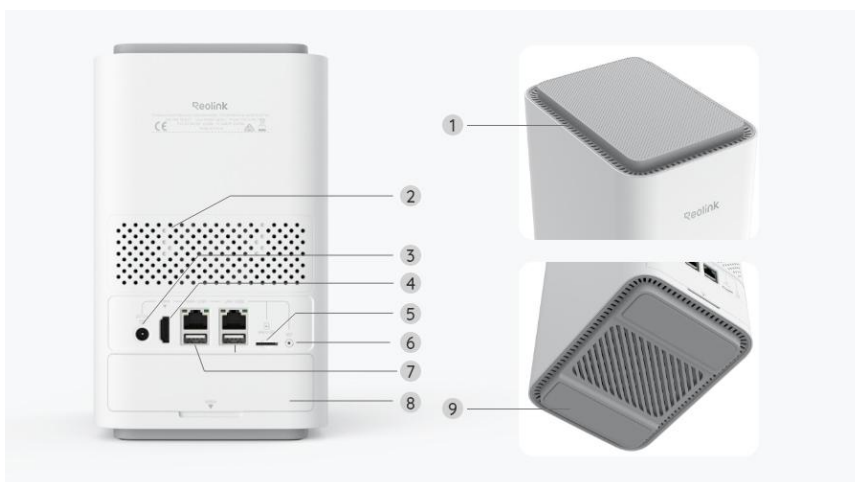

1. Ventilation Holes
2. Speaker
3. DC Input Port
4. HDMI Port
5. microSD Card Slot
6. Reset Button
7. USB Port
8. Hard Drive Bay
9. Silicone Pads



1. Indicator Light
2. Spotlight
3. Lens
4. Daylight Sensor
5. Infrared Light
6. Microphone



1. Speaker
2. Bracket
3. Reset Hole
4. microSD Card Slot

