

Reolink Home Hub Pro

Wi-Fi 6 Security Center with 2TB HDD and Advanced Privacy Encryption, Supporting Up to 16TB HDD, 512GB microSD Card, 16 Reolink Cameras, 16MP Live Streaming & Playback, and 24/7 Local Recording.

- Built-In 2TB HDD
- Wi-Fi 6 Ready
- Up to 24 Reolink Cams Supported
- Encrypted Local Storage Without Fees



Specifications

Device Management	
Camera	Up to 24 Cameras (up to 12 wired cameras)
Device Compatibility	All Reolink battery Wi-Fi cameras, Plug-in Wi-Fi cameras, and PoE cameras (Battery cameras require a firmware upgrade)
Safety Protection	Account access and sharing options for individual devices are only available through Home Hub Pro
Input/Output	
HDMI	YES
USB	YES
Reset Button	YES
Power	DC 12V/2A
Speaker	Max.120dB


Ethernet	1 x RJ-45 10/100 Mbps self-adaptive (for WAN),1 x RJ-45, 10/100 Mbps self-adaptive (for IP cameras)
Storage	
SATA	YES (1 x 2TB HDD included)
microSD Card Slot	Up to 512GB*1(microSD card is unable to save videos when both the HDD and microSD card are inserted.)
Storage Encryption	AES-128 encryption algorithm
Preview & Playback	
Live View	App, PC Client
Playback	Smart playback/event history
Wi-Fi	
Wireless Standard	IEEE 802.11 a/b/g/n/ac/ax
Operating Frequency	2.4/5 GHz
Wireless Security	WPA/WPA2/WPA3
Sub-1 GHz	
Operating Frequency	868/915MHz
System	
Network Protocols	TCP/IP, UDP, DHCP, P2P, UPNP, RTSP,RTMP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Max. User Access	11 users (1 admin account & 10 shared accounts)
Smart Home	Google Assistant
Working Environment	
Operating Temperature	-10°C~+45°C
Operating Humidity	10%~90%
Mechanical	
Dimensions	185*133*222mm
Weight	1096g

Warranty


Limited Warranty

2-year limited warranty

Gallery & Specs

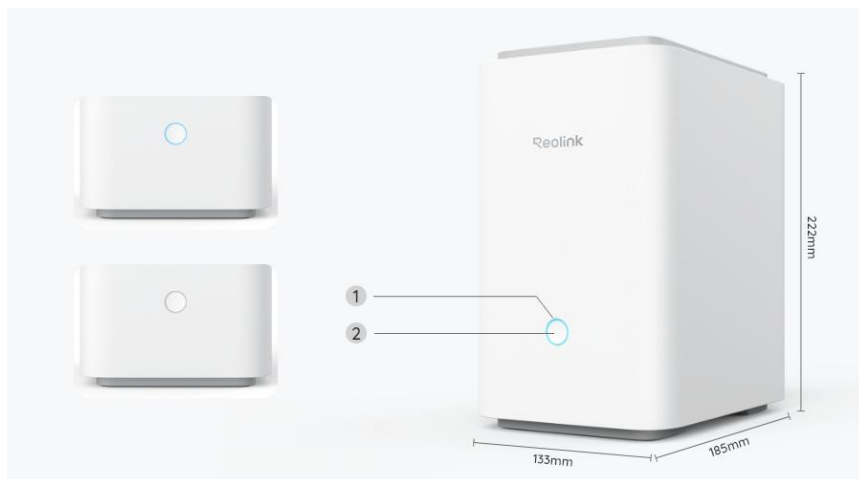

- 1. Indicator LED
- 2. Power Button

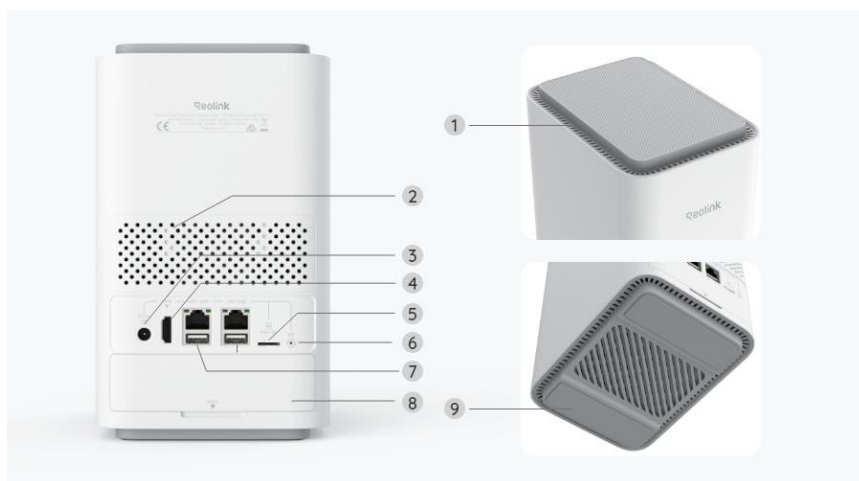

- 1. Ventilation Holes
- 2. Speaker
- 3. DC Input Port
- 4. HDMI Port
- 5. microSD Card Slot
- 6. Reset Button
- 7. USB Port
- 8. Hard Drive Bay
- 9. Silicone Pads

www.reolink.com